

Easy Cleaning, Multi-Function, Reliable


TA

Standard Specifications


Model	Unit	TA-50L	TA-95L	TA-175L
Tank Dimension	W	mm 400	500	600
Frame Dimension	H	mm 942.5	942.5	1,000.8
Volume	L	55	95	175
	kg	33	57	105
Material		Stainless Steel		
Product Weight	kg	23	26	32

※ Volume is that of when using virgin materials with bulk density of 0.6 g/cm³.

TA-95L



T-350L



T

Standard Specifications

Model	Unit	T-260L	T-350L	T-600L
Tank Dimension	W	mm 820	950	1,200
Frame Dimension	H	mm 1,039.5	1,039.5	1,139.5
Volume	L	260	350	600
	kg	156	210	360
Material		SUS304		
Product Weight	kg	48	55	75



※ Volume is that of when using virgin materials with bulk density of 0.6 g/cm³.

Options

• Lower level alarm • Alarm indicator • Magnet • Half open lid (TA-50/95/175L Only)

Suction Box



SKB Nozzle type (Option: 1-4 directions)



Model	Unit	SKB-38-1	SKB-40-1	SKB-50-1	SKB-38-2	SKB-40-2	SKB-50-2
Dimension	φ D	mm 48.6	60.5	76.3	48.6	60.5	76.3
	H	mm 100			200		250
	L	mm 35	40	50	35	40	50
	P	mm -			100		120
Material		SUS304					

Option : 1-4 directions

KKB Hose type (Option: 1-3 directions)

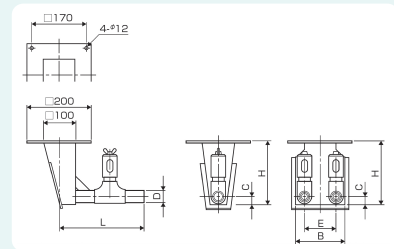

Model	Unit	KKB-38-1	KKB-40-1	KKB-50-1	KKB-38-2	KKB-40-2	KKB-50-2
Dimension	B	mm -			150	180	210
	C	mm 25	30	35	25	30	35
	D	mm 38	48.6	60.5	38	48.6	60.5
	E	mm -			100	120	130
	H	mm 200		250	200		250
	L	mm 265.2	344.4	357	265.2	284.4	297

Option : 1-3 directions